
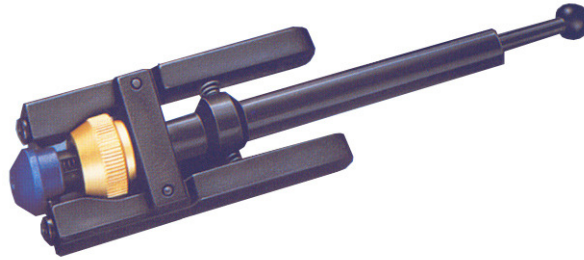


Cat. No. 06805**OPTI-STRIP**

Designed to remove the secondary coatings from optical leads and small cables up to 3000 microns. Is equally effective whether used on 'loose' or 'tight fit' fibres. Supplied with guide bushes to ensure precise location of fibre throughout the stripping operation. Simple operating procedure with adjustable blades.

- **Easy and Simple to Use.**
- **Highly Accurate Adjustable Cutting Depth**
- **Packed in its own Carry Case with a Set of Guide Bushes.**

Technical Specifications

Capacity:

Stripping: Fibre Optic leads from
0 - 3000 micron.
P.T.F.E. coated wires
0.5 - 3.0 mm diameter.

Dimensions: 29 x 13 x 108mm.

Weight: 20gms